

10-03-00

A



PATENT APPLICATION  
Express Mail Label No. EL436467793US  
Attorney Docket No. NA00-13501

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT  
APPLICATION TRANSMITTAL LETTER



Asst. Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Sir:

Enclosed for filing is an ☒ original patent application or, ☐ a continuation-in-part patent application, by inventor(s) William F. Price III, entitled METHOD AND APPARATUS FOR FACILITATING SECURE ANONYMOUS EMAIL RECIPIENTS.

No. of pages in Application: 23; No. of Claims: 27.

No. of Sheets of Drawings: Formal: 2, Informal:    .

Also enclosed are:

- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 in
- ☐ a separate document ☐ the declaration;
- ☐ a certified copy of the priority document;
- ☐ an Associate Power of Attorney;
- ☐     verified statement(s) claiming small entity status;
- ☒ a Combined Declaration and Power of Attorney of the inventors(s);
- ☐ a signed Combined Declaration and Power of Attorney of the inventors will follow;
- ☒ an Assignment document and form PTO-1595;
- ☐ a Power of Attorney by Assignee; and
- ☐ Information Disclosure Statement and Form PTO-1449.

0967292-100200

The fee has been calculated as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$710.00
Total Claims	27	MINUS 20 =	7	\$18.00=	\$126.00
Independent Claims	6	MINUS 3 =	3	\$80.00=	\$240.00
If multiple dependent claims are presented, add \$260.00					0
Total Application Fee					\$1076.00
If verified statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					
Add Recording Fee of \$40.00 if Assignment document is enclosed					\$40.00
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$1116.00</b>

- ☒ A check in the amount of \$ 1116.00 is enclosed.
- ☐ Application fee will follow with missing parts.
- ☒ Please deduct any underpayments or credit any overpayments to Deposit Account Number 50-1003.

Please direct all correspondence concerning the above-identified application to the following address:

A. Richard Park  
Park & Vaughan LLP  
508 Second Street, Suite 201  
Davis, CA 95616  
(530) 759-1661



**22835**

PATENT TRADEMARK OFFICE

Respectfully submitted,

By

A. Richard Park  
Registration No. 41,241

Date: October 2, 2000

5

10                   **METHOD AND APPARATUS FOR**  
**FACILITATING SECURE ANONYMOUS**  
**EMAIL RECIPIENTS**

15                   **Inventor:** William F. Price III

20                   **BACKGROUND**

25                   **Field of the Invention**

                  The present invention relates to computer security and electronic mail.  
More specifically, the present invention relates to a method and an apparatus for  
facilitating transmission of an encrypted electronic mail message to anonymous  
recipients without divulging the identities of the anonymous recipients.

30                   **Related Art**

                  The advent of computer networks has led to an explosion in the  
development of applications that facilitate rapid dissemination of information. In  
particular, electronic mail (email) is becoming the predominant method for

communicating textual and other non-voice information. Using email, it is just as easy to send a message to a recipient on another continent as it is to send a message to a recipient within the same building. Furthermore, an email message typically takes only minutes to arrive, instead of the days it takes for conventional mail to snake its way along roads and through airports.

One problem with email is that it is hard to ensure that sensitive information sent through email is kept confidential. This is because an email message can potentially traverse many different computer networks and many different computer systems before it arrives at its ultimate destination. An adversary can potentially intercept an email message at any of these intermediate points along the way.

One way to remedy this problem is to "encrypt" sensitive data using an encryption key so that only someone who possesses a corresponding decryption key can decrypt the message. (Note that for commonly used symmetric encryption mechanisms the encryption key and the decryption key are the same key.) A person sending sensitive data through email can encrypt the sensitive data using the encryption key before it is sent through email. At the other end, the recipient of the email can use the corresponding decryption key to decrypt the sensitive information.

Encryption works well for a message sent to a single recipient. However, encryption becomes more complicated for a message sent to multiple recipients. This is because encryption keys must be managed between the sender and the multiple recipients.

Conventional mail protocols, such as the Pretty Good Privacy (PGP) protocol, send mail to multiple recipients by encrypting a message with a session key (that is randomly selected for the message) to form an encrypted message. The session key is then encrypted with the public key of each of the recipients to

form a set of encrypted keys. This set of encrypted keys is sent with the encrypted message to all of the recipients. Each recipient uses one of its private keys to decrypt an encrypted session key and then uses the session key to decrypt the encrypted message.

5           Note that key identifiers for the public keys that were used to encrypt the encrypted session keys are sent along with the encrypted session keys, so that each recipient can determine whether or not the recipient possesses a corresponding private key that can decrypt the encrypted session key. These identifiers are typically generated by computing as a hash of the public key.

10           Unfortunately, the key identifiers can also identify a recipient of an email message to other recipients of the email message. This complicates the process of sending an encrypted email message to anonymous recipients, because the recipients of the email message can determine the identities of the anonymous recipients by examining the key identifiers for the anonymous recipients.

15           What is needed is a method and an apparatus for facilitating transmission of encrypted email to anonymous recipients without divulging the identities of the anonymous recipients.

### SUMMARY

20           One embodiment of the present invention provides a system that facilitates secure transmission of an email message to anonymous recipients without divulging the identities of the anonymous recipients. This system constructs an email message by identifying recipients of the email message. These recipients can include known recipients, who can be identified by examining the email  
25           message, and anonymous recipients, who cannot be identified by examining the email message. The system also generates a session key for the email message, and encrypts a body of the email message with the session key. The system also

002007 2522950

creates a recipient block for the email message that contains an entry for each recipient of the email message. Each entry in this recipient block contains the session key encrypted with a public key associated with the recipient to form an encrypted session key, so that only a corresponding private key held by the  
5 recipient can be used to decrypt the encrypted session key. Each entry additionally contains an identifier for the associated public key, so that each recipient can determine whether the recipient possesses a corresponding private key that can decrypt the encrypted session key. These identifiers are constructed so that identifiers for public keys belonging to known recipients are statistically  
10 unique, and identifiers for public keys belonging to anonymous recipients are not statistically unique. Finally, the system sends the email message to the recipients.

In one embodiment of the present invention, identifiers for public keys belonging to anonymous recipients provide only enough information to exclude a large percentage of all possible corresponding private keys from being able to  
15 decrypt the body of the email message.

In one embodiment of the present invention, an identifier for a public key is formed by creating a hash of the public key.

In one embodiment of the present invention, an identifier for a public key belonging to an anonymous recipient is additionally modified so the identifier is  
20 not statistically unique. In this way, the identifier cannot be used to uniquely identify the anonymous recipient. However, a recipient can use the identifier to exclude a large percentage of all possible corresponding public keys held by the recipient from matching the identifier.

In one embodiment of the present invention, prior to encrypting the body  
25 of the email message, the system includes a checksum into the body of the email message, so that a recipient can examine the checksum to verify that the correct private key was used in decrypting the email message.

002007 2527950

One embodiment of the present invention provides a system that facilitates secure transmission of an email message to anonymous recipients without divulging the identities of the anonymous recipients. This system operates by receiving the email message at a recipient. This email message includes a message body that has been encrypted with a session key. It also includes a recipient block that contains an entry for each recipient of the email message. Each of these entries contains the session key encrypted with a public key associated with the recipient to form an encrypted session key. Each entry additionally contains an identifier for the associated public key, wherein identifiers for public keys belonging to known recipients are statistically unique, and identifiers for public keys belonging to anonymous recipients are not statistically unique. Next, the system attempts to match a candidate public key held by the recipient with key identifier in the recipient block. If the candidate public key matches a key identifier, the system decrypts the associated encrypted session key using an associated private key to restore the session key, and then decrypts the message body using the session key. The system then examines a checksum in the message body to verify that message body was correctly decrypted.

## **BRIEF DESCRIPTION OF THE FIGURES**

FIG. 1 illustrates the transmission of an email message from a sender to recipients across a network in accordance with an embodiment of the present invention.

FIG. 2 illustrates the structure of an encrypted email message in accordance with an embodiment of the present invention.

FIG. 3 is a flow chart illustrating the process of generating an encrypted email message at a sender in accordance with an embodiment of the present invention.

FIG. 4 is a flow chart illustrating the process of decrypting an encrypted email message at a recipient in accordance with an embodiment of the present invention.

### DETAILED DESCRIPTION

The following description is presented to enable any person skilled in the art to make and use the invention, and is provided in the context of a particular application and its requirements. Various modifications to the disclosed embodiments will be readily apparent to those skilled in the art, and the general principles defined herein may be applied to other embodiments and applications without departing from the spirit and scope of the present invention. Thus, the present invention is not intended to be limited to the embodiments shown, but is to be accorded the widest scope consistent with the principles and features disclosed herein.

The data structures and code described in this detailed description are typically stored on a computer readable storage medium, which may be any device or medium that can store code and/or data for use by a computer system. This includes, but is not limited to, magnetic and optical storage devices such as disk drives, magnetic tape, CDs (compact discs) and DVDs (digital versatile discs or digital video discs), and computer instruction signals embodied in a transmission medium (with or without a carrier wave upon which the signals are modulated). For example, the transmission medium may include a communications network, such as the Internet.



### **Transmission of Email Message**

FIG. 1 illustrates the transmission of an email message 104 from a sender 102 to recipients 108-110 across a network 106 in accordance with an embodiment of the present invention. Network 106 can include any type of wire or wireless communication channel capable of coupling together computing nodes. This includes, but is not limited to, a local area network, a wide area network, or a combination of networks. In one embodiment of the present invention, network 106 includes the Internet.

Sender 102 can include any type of computing system that can send an email message, while recipients 108-110 can include any type of computing systems that can receive an email message.

Recipients 108-110 hold private keys 112-114, respectively. These private keys 112-114 enable recipients 108-110 to decrypt email messages that have been encrypted with corresponding public keys.

Note that knowledge of a public key cannot be used to decrypt a message encrypted with the public key. The corresponding private key must be used, and this private key is typically kept in secrecy by recipients 108-110.

The system illustrated in FIG. 1 operates generally as follows. Sender 102 produces an email message, the body of which is encrypted with a session key.

This session key is encrypted with the public key of each of the recipients. Next, the encrypted message and the encrypted session key are sent to recipients 108-110 across network 106. Recipients 108-110 use their private keys 112-114 to decrypt the encrypted session key, and then use the session key to decrypt the body of the email message.

### **Structure of Email Message**

FIG. 2 illustrates the structure of an encrypted email message 104 in accordance with an embodiment of the present invention. Email message 104 includes an encrypted message body 206 containing information to be communicated to from sender 102 to recipients 108-110. Encrypted message body 206 is created by first producing a checksum (otherwise known as a hash or a message digest) of the message body and then encrypting the message body with a session key. This session key can be randomly generated by the sender for the message.

10 Email message 104 also includes a recipient block 204 containing an entry for each recipient of email message 104. In FIG. 2, recipient block 204 contains three entries 220-222 for each of three recipients 108-110 of email message 104.

Each entry contains an encrypted session key and a key ID. More specifically: entry 220 contains encrypted session key 214 and key ID 210; entry 15 221 contains encrypted session key 216 and key ID 211; and entry 222 contains encrypted session key 218 and key ID 212.

Each encrypted session key is formed by encrypting the session key for the message with a public key belonging to a recipient so that the encrypted session key can be decrypted with a corresponding private key of the recipient. For example, if entry 220 is for recipient 108, encrypted session key 214 is formed by 20 encrypting the session key with a public key belonging to recipient 108. This enables recipient 108 to decrypt the encrypted session key with a corresponding private key held by recipient 108.

Each key ID is formed by taking a hash of the public key that was used to 25 encrypt the associated encrypted session key. For example, if entry 220 corresponds to recipient 108, key ID 210 is formed by taking a hash of the public key for recipient 108. Key ID 210 can then be used by recipient 108 to determine

whether recipient 108 possesses the corresponding private key within private keys 112 to decrypt encrypted session key 214.

Note that key ID 210 is typically long, for example 64 bits. This ensures that key ID 210 is statistically unique – although uniqueness cannot be guaranteed because there exists an almost non-existent probability that two different public  
5 keys will result in the same 64-bit hash.

Entry 222 corresponds to an anonymous recipient 110, who cannot be identified by examining the email message. In order to protect the identity of anonymous recipient 110, key ID 212 is truncated to a small number of bits; for  
10 example, three to six bits. In this way, key ID 212 cannot be used to uniquely identify anonymous recipient 110. However, anonymous recipient 110 can use the key identifier 212 to exclude a large percentage of all possible corresponding private keys 114 held by recipient 110 from matching the identifier. Hence, if  
15 anonymous recipient 110 possesses a private key to decrypt encrypted session key 218, anonymous recipient 110 must try at most a small number of its private keys to determine if it possesses the proper private key. Without truncated key ID 212, anonymous recipient 110 may potentially have to try all of its private keys 114.

#### **Process of Generating an Encrypted Email Message**

20 FIG. 3 is a flow chart illustrating the process of generating an encrypted email message 104 at sender 102 in accordance with an embodiment of the present invention. The system starts by identifying recipients of email message 104 (step 302). These recipients can include known recipients, who can be identified by examining the email message, and anonymous recipients, who  
25 cannot be identified by examining the email message. The system also generates a session key for the email message (step 304). This session key can be generated randomly by sender 102.

The system additionally generates checksum 208 for the email message body using some type of hashing mechanism (step 306). The system then encrypts the message body and the checksum to form encrypted message body 206 (step 308).

5           The system also creates recipient block 204 for email message 104 (step 310). Each of the entries 220-222 in recipient block 204 contain the session key encrypted with a public key associated with the corresponding recipient to form an encrypted session key. This ensures that only a corresponding private key held by the recipient can be used to decrypt the encrypted session key.

10           Each entry additionally contains an identifier for the associated public key, so that each recipient can determine whether the recipient possesses a corresponding private key that can decrypt the encrypted session key. These identifiers are constructed so that identifiers for public keys belonging to known recipients are statistically unique, for example by using a hashing mechanism.

15           Identifiers for public keys belonging to anonymous recipients are modified so that they are not statistically unique; for example by truncating the hash to a small number of bits. Finally, the system sends the email message to the recipients (step 312).

## 20           **Process of Decrypting an Encrypted Email Message**

FIG. 4 is a flow chart illustrating the process of decrypting an encrypted email message 104 at a recipient 110 in accordance with an embodiment of the present invention. Recipient 110 starts by receiving email message 104 generated by sender 102 (step 402). Next, recipient 110 attempts to match key IDs 210-212

25           (from recipient block 204 in email message 104) with public keys corresponding to the private keys 114 held by recipient 110 (step 404).

002007" 2522950

If a public key matches a key ID, for example say a public key held by recipient 110 matches truncated key ID 212, recipient 110 decrypts the corresponding encrypted session key 218 with the private key corresponding to the matching public key. This restores the session key. Recipient 110 then  
5 decrypts encrypted message body 206 using the restored session key, and then verifies that the checksum 208 is properly formed from the message body (step 406). Verifying the checksum additionally verifies that the proper private key was used to restore the session key.

If more than one public key held by recipient 110 matches a key ID in  
10 recipient block 204, recipient 110 may have to repeat this decryption and verification process for more than one public key.

The foregoing descriptions of embodiments of the invention have been presented for purposes of illustration and description only. They are not intended to be exhaustive or to limit the present invention to the forms disclosed.  
15 Accordingly, many modifications and variations will be apparent to practitioners skilled in the art. Additionally, the above disclosure is not intended to limit the present invention. The scope of the present invention is defined by the appended claims.

**What Is Claimed Is:**

- 1        1.        A method for facilitating secure transmission of an email message  
2        to anonymous recipients without divulging the identities of the anonymous  
3        recipients, comprising:  
4                identifying recipients of the email message, wherein the recipients can  
5        include known recipients, who can be identified by examining the email message,  
6        and anonymous recipients, who cannot be identified by examining the email  
7        message;  
8                generating a session key for the email message;  
9                encrypting a body of the email message with the session key;  
10                creating a recipient block for the email message that contains an entry for  
11        each recipient of the email message;  
12                wherein each entry in the recipient block contains the session key  
13        encrypted with a public key associated with the recipient to form an encrypted  
14        session key, so that only a corresponding private key held by the recipient can be  
15        used to decrypt the encrypted session key;  
16                wherein each entry additionally contains an identifier for the associated  
17        public key, so that each recipient can determine whether the recipient possesses  
18        the corresponding private key that can decrypt the encrypted session key;  
19                wherein identifiers for public keys belonging to known recipients are  
20        statistically unique;  
21                wherein identifiers for public keys belonging to anonymous recipients are  
22        not statistically unique; and  
23                sending the email message to the recipients.

002200T" 2622650

1           2.       The method of claim 1, wherein identifiers for public keys  
2 belonging to anonymous recipients provide only enough information to exclude a  
3 large percentage of all possible corresponding private keys from being able to  
4 decrypt the body of the email message.

1           3.       The method of claim 2, wherein an identifier for a public key is  
2 formed by creating a hash of the public key.

1           4.       The method of claim 3, wherein an identifier for a public key  
2 belonging to an anonymous recipient is additionally modified so the identifier is  
3 not statistically unique;  
4           whereby the identifier cannot be used to uniquely identify the anonymous  
5 recipient; and  
6           whereby a recipient can use the identifier to exclude a large percentage of  
7 all possible corresponding public keys held by the recipient from matching the  
8 identifier.

1           5.       The method of claim 1, further comprising, - encrypting the body  
2 of the email message, including a checksum into the body of the email message,  
3 so that a recipient can examine the checksum to verify that the correct private key  
4 was used in decrypting the email message.

1           ~~6.~~       A method for facilitating secure transmission of an email message  
2 to anonymous recipients without divulging the identities of the anonymous  
3 recipients, comprising:  
4           receiving the email message at a recipient, wherein the email message  
5 includes,

0022007" 25222560

1 a message body that has been encrypted with a session key,  
2 a recipient block that contains an entry for each recipient of  
3 the email message,  
4 wherein each entry in the recipient block contains the  
5 session key encrypted with a public key associated with the  
6 recipient to form an encrypted session key,  
7 wherein each entry additionally contains an identifier for  
8 the associated public key,  
9 wherein identifiers for public keys belonging to known  
10 recipients are statistically unique, and  
11 wherein identifiers for public keys belonging to anonymous  
12 recipients are not statistically unique;  
13 attempting to match a candidate public key held by the recipient with key  
14 identifier in the recipient block;  
15 if the candidate public key matches a key identifier,  
16 decrypting the associated encrypted session key using an  
17 associated private key to restore the session key,  
18 decrypting the message body using the session key, and  
19 examining a checksum in the message body to verify that  
20 message body was correctly decrypted.

1 7. The method of claim 6, wherein identifiers for public keys  
2 belonging to anonymous recipients provide only enough information to exclude a  
3 large percentage of all possible corresponding private keys from being able to  
4 decrypt the message body of the email message.





16 session key, so that only a corresponding private key held by the recipient can be  
17 used to decrypt the encrypted session key;  
18 wherein each entry additionally contains an identifier for the public key, so  
19 that each recipient can determine whether the recipient possesses the  
20 corresponding private key that can decrypt the encrypted session key;  
21 wherein identifiers for public keys belonging to known recipients are  
22 statistically unique;  
23 wherein identifiers for public keys belonging to anonymous recipients are  
24 not statistically unique; and  
25 sending the email message to the recipients.

1 11. The computer-readable storage medium of claim 10, wherein  
2 identifiers for public keys belonging to anonymous recipients provide only enough  
3 information to exclude a large percentage of all possible corresponding private  
4 keys from being able to decrypt the body of the email message.

1 12. The computer-readable storage medium of claim 11, wherein an  
2 identifier for a public key is formed by creating a hash of the public key.

1 13. The computer-readable storage medium of claim 12, wherein an  
2 identifier for a public key belonging to an anonymous recipient is additionally  
3 modified so the identifier is not statistically unique;  
4 whereby the identifier cannot be used to uniquely identify the anonymous  
5 recipient; and  
6 whereby a recipient can use the identifier to exclude a large percentage of  
7 all possible public keys belonging to the recipient from matching the identifier.

000007 252 100200

1           14.    The computer-readable storage medium of claim 10, wherein prior  
2   to encrypting the body of the email message, the method further comprises  
3   including a checksum into the body of the email message, so that a recipient can  
4   examine the checksum to verify that the correct private key was used in  
5   decrypting the email message.

1           15.    A computer-readable storage medium storing instructions that  
2   when executed by a computer cause the computer to perform a method for  
3   facilitating secure transmission of an email message to anonymous recipients  
4   without divulging the identities of the anonymous recipients, the method  
5   comprising:  
6           receiving the email message at a recipient, wherein the email message  
7   includes,  
8                   a message body that has been encrypted with a session key,  
9                   a recipient block that contains an entry for each recipient of  
10           the email message,  
11                   wherein each entry in the recipient block contains the  
12           session key encrypted with a public key associated with the  
13           recipient to form an encrypted session key,  
14                   wherein each entry additionally contains an identifier for  
15           the associated public key,  
16                   wherein identifiers for public keys belonging to known  
17           recipients are statistically unique, and  
18                   wherein identifiers for public keys belonging to anonymous  
19           recipients are not statistically unique;  
20           attempting to match a candidate public key held by the recipient with key  
21   identifier in the recipient block;

002200T 25222960

1 if the candidate public key matches a key identifier,  
2 decrypting the associated encrypted session key using an  
3 associated private key to restore the session key,  
4 decrypting the message body using the session key, and  
5 examining a checksum in the message body to verify that  
6 message body was correctly decrypted.

1 16. The computer-readable storage medium of claim 15, wherein  
2 identifiers for public keys belonging to anonymous recipients provide only enough  
3 information to exclude a large percentage of all possible corresponding private  
4 keys from being able to decrypt the message body of the email message.

1 17. The computer-readable storage medium of claim 16, wherein an  
2 identifier for a public key is formed by creating a hash of the public key.

1 18. The computer-readable storage medium of claim 17, wherein an  
2 identifier for a public key belonging to an anonymous recipient is additionally  
3 modified so the identifier is not statistically unique;  
4 whereby the identifier cannot be used to uniquely identify the anonymous  
5 recipient; and  
6 whereby a recipient can use the identifier to exclude a large percentage of  
7 all possible public keys belonging to the recipient from matching the identifier.

1 19. An apparatus that facilitates secure transmission of an email  
2 message to anonymous recipients without divulging the identities of the  
3 anonymous recipients, comprising:

4 an identifying mechanism that is configured to identify recipients of the  
5 email message, wherein the recipients can include known recipients, who can be  
6 identified by examining the email message, and anonymous recipients, who  
7 cannot be identified by examining the email message;  
8 a key generation mechanism that is configured to generate a session key  
9 for the email message;  
10 an encryption mechanism that is configured to encrypt a body of the email  
11 message with the session key;  
12 a recipient block creation mechanism that is configured to create a  
13 recipient block for the email message that contains an entry for each recipient of  
14 the email message;  
15 wherein each entry in the recipient block contains the session key  
16 encrypted with a public key associated with the recipient to form an encrypted  
17 session key, so that only a corresponding private key held by the recipient can be  
18 used to decrypt the encrypted session key;  
19 wherein each entry additionally contains an identifier for the associated  
20 public key, so that each recipient can determine whether the recipient possesses  
21 the corresponding private key that can decrypt the encrypted session key;  
22 wherein identifiers for public keys belonging to known recipients are  
23 statistically unique;  
24 wherein identifiers for public keys belonging to anonymous recipients are  
25 not statistically unique; and  
26 a sending mechanism that is configured to send the email message to the  
27 recipients.

1 20. The apparatus of claim 19, wherein identifiers for public keys  
2 belonging to anonymous recipients provide only enough information to exclude a



002001 252/960

1 a recipient block that contains an entry for each recipient of  
2 the email message,  
3 wherein each entry in the recipient block contains the  
4 session key encrypted with a public key associated with the  
5 recipient to form an encrypted session key,  
6 wherein each entry additionally contains an identifier for  
7 the associated public key,  
8 wherein identifiers for public keys belonging to known  
9 recipients are statistically unique, and  
10 wherein identifiers for public keys belonging to anonymous  
11 recipients are not statistically unique;  
12 a matching mechanism that is configured to attempt to match a candidate  
13 public key belonging to the recipient with key identifier in the recipient block;  
14 a decryption mechanism, wherein if the candidate public key matches a  
15 key identifier, the decryption mechanism is configured to,  
16 decrypt the associated encrypted session key using a  
17 corresponding private key to restore the session key,  
18 decrypt the message body using the session key, and to  
19 examine a checksum in the message body to verify that  
20 message body was correctly decrypted.

1 25. The apparatus of claim 24, wherein identifiers for public keys  
2 belonging to anonymous recipients provide only enough information to exclude a  
3 large percentage of all possible corresponding private keys from being able to  
4 decrypt the message body of the email message.

1           26.     The apparatus of claim 25, wherein an identifier for a public key is  
2     a hash of the public key.

1           27.     The apparatus of claim 26, wherein an identifier for a public key  
2     belonging to an anonymous recipient is additionally modified so the identifier is  
3     not statistically unique;

4                 whereby the identifier cannot be used to uniquely identify the anonymous  
5     recipient; and

6                 whereby a recipient can use the identifier to exclude a large percentage of  
7     all possible public keys belonging to the recipient from matching the identifier.

002007 2622960



# METHOD AND APPARATUS FOR FACILITATING SECURE ANONYMOUS EMAIL RECIPIENTS

## ABSTRACT

One embodiment of the present invention provides a system that facilitates secure transmission of an email message to anonymous recipients without divulging the identities of the anonymous recipients. This system constructs an email message by identifying recipients of the email message. These recipients can include known recipients, who can be identified by examining the email message, and anonymous recipients, who cannot be identified by examining the email message. The system also generates a session key for the email message, and encrypts a body of the email message with the session key. The system also creates a recipient block for the email message that contains an entry for each recipient of the email message. Each entry in this recipient block contains the session key encrypted with a public key associated with the recipient to form an encrypted session key, so that only a corresponding private key held by the recipient can be used to decrypt the encrypted session key. Each entry additionally contains an identifier for the associated public key, so that each recipient can determine whether the recipient possesses a corresponding private key that can decrypt the encrypted session key. These identifiers are constructed so that identifiers for public keys belonging to known recipients are statistically unique, and identifiers for public keys belonging to anonymous recipients are not statistically unique. Finally, the system sends the email message to the recipients.

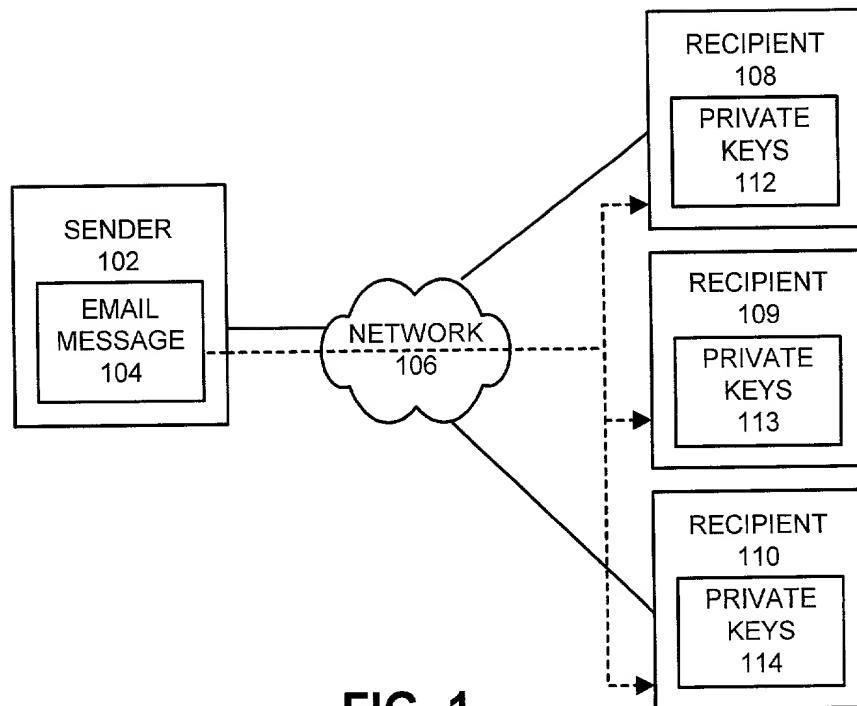


FIG. 1

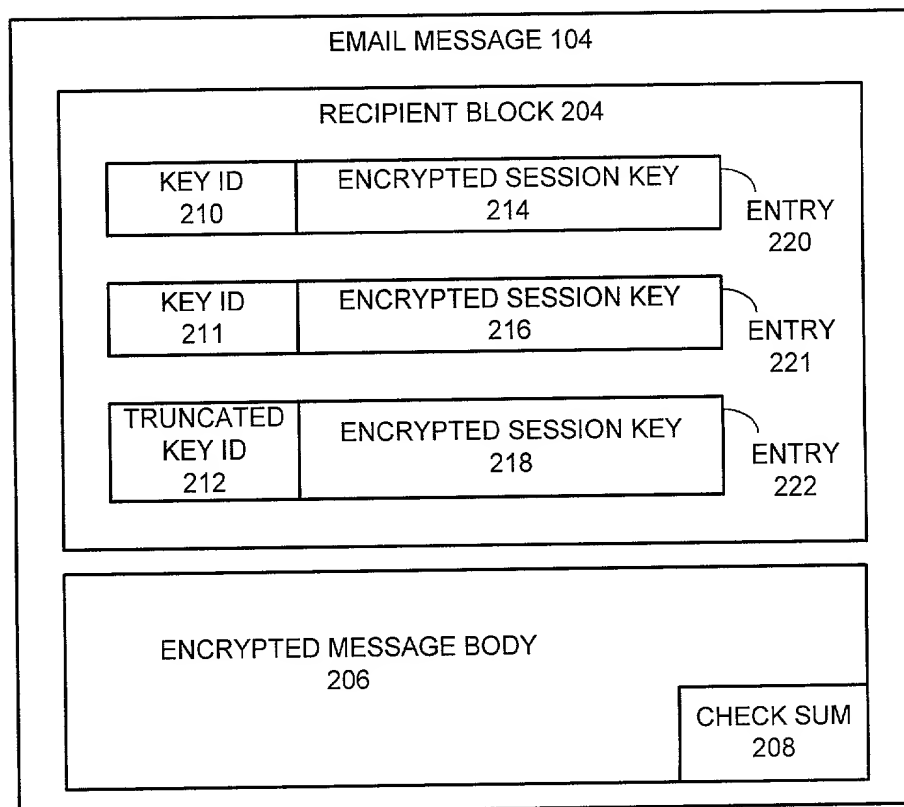


FIG. 2

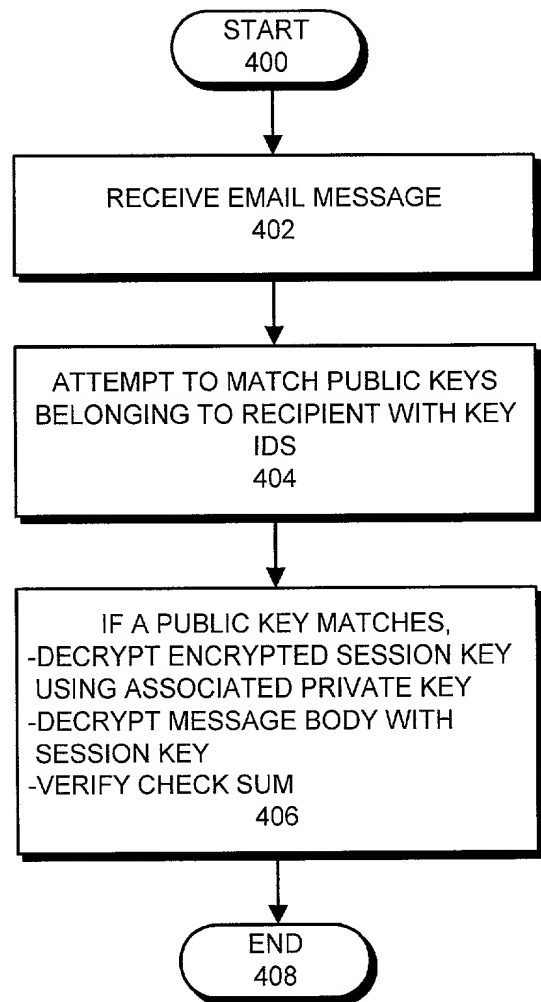
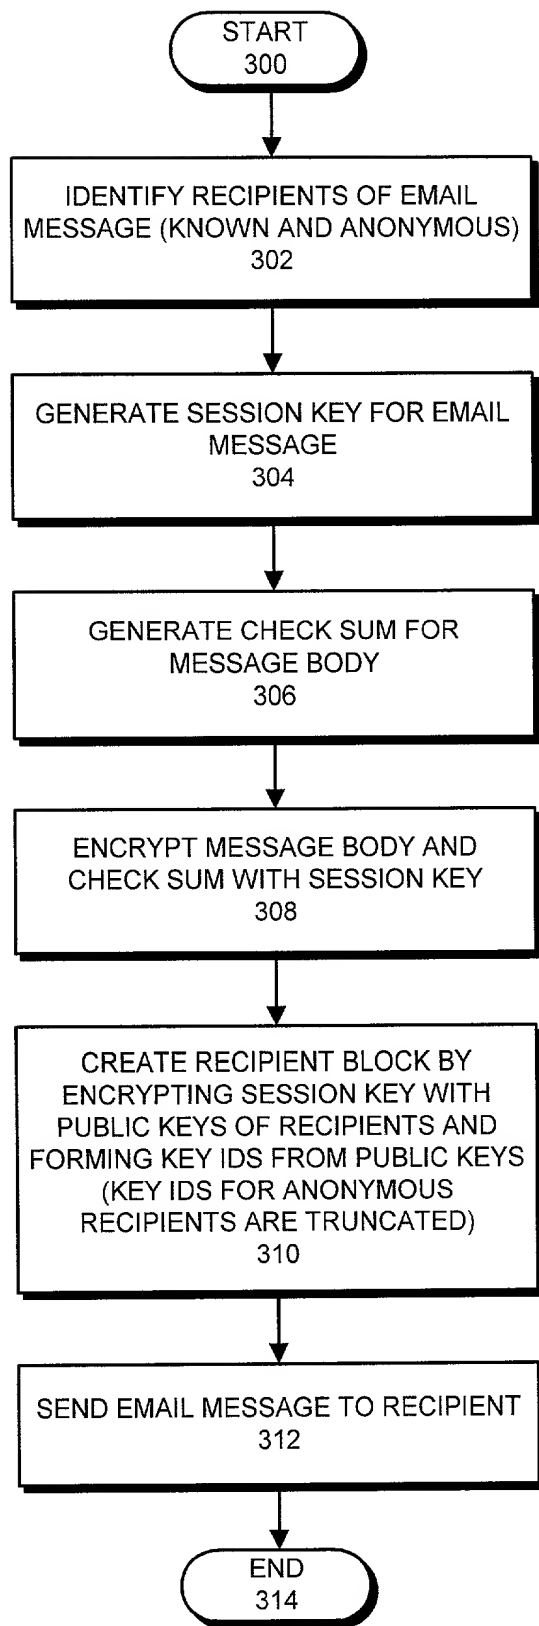


FIG. 3

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below by my name;

I believe I am the original, first and sole inventor, if only one name is listed below, or an original, first and joint inventor if multiple names are listed below, of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD AND APPARATUS FOR FACILITATING SECURE ANONYMOUS EMAIL RECIPIENTS**

for which a patent application:

☒ is attached hereto.

☐ was filed in the United States on \_ as Application No. \_;

☐ with amendment(s) filed on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the application identified above, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56, which states in relevant part:

Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section . . . The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office. .

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d), of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (Day, Month, Year)	PRIORITY CLAIMED
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §119(e), of any United States provisional application(s) listed below:

APPLICATION NUMBER	DATE OF FILING

I hereby claim the benefit under Title 35, United States Code, §120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information that is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NUMBER	DATE OF FILING	STATUS		
		PATENTED	PENDING	ABANDONED

I hereby appoint Daniel E. Vaughan (Reg. No. 42,199) and A. Richard Park (Reg. No. 41,241) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and to file, prosecute and transact all business in connection with international applications directed to said invention.

Address correspondence to:  
**Park & Vaughan LLP**  
**508 Second Street, Suite 201**  
**Davis, CA 95616**



**22835**

PATENT TRADEMARK OFFICE

Direct telephone calls to:

A. Richard Park  
 (530) 759-1661

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Name and Citizenship	William F. Price III	United States of America
	Residence Address	35 Alma Ct., Los Altos, CA 94022	
	Postal Address (if different from Residence)		
	Signature and Date	<i>William F. Price III</i>	Date 9/27/00
2	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date
3	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date
4	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date
5	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date

Additional inventor name(s) and signature(s) attached?: YES ☐ NO ☒